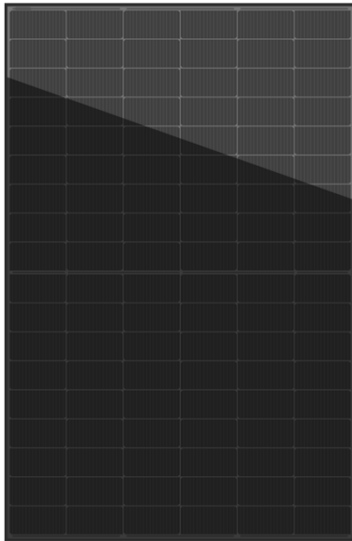


# HT54-18X(ND)-F

Double Glass TOPCon PV Module

**HIGH** High power

**440W/445W**
**450W/455W/460W**


- Module Efficiency: 23.0%
- No. of Cells 108(6×18)
- Weight 25.0(±0.5)kg
- Dimensions 1762×1134×30mm
- Bifaciality 80(±5)%


**SCANOFFICE**  
**SOLAR**


Juvanmalmintie 11  
02970 Espoo  
info@scanoffice.fi  
www.scanoffice.fi



Half cut cell technology can reduce the internal power loss and improve module overall power. Excellent heat dissipation avoids hot spot production.

## TOPCon

Double glass, The optimized number and width of main gate lines, Maximize the light receiving area of modules and Reduce module power consumption.


**1500V**

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs.

## 15years

Products warranty

## 30years

Warranty on power output

## EL

Microcrack resistant  
Double glass structure enhance reliability,  
double EL tested of high quality control.



Entire module certified to with stand extreme wind(2400 Pa) and snow loads (5400 Pa)


**2%**

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

## 0~+3%

Positive tolerance  
0~+3% guaranteed

## Anti PID

PID resistant

### Comprehensive and first-rate certification system

IEC 61215, IEC 61730 Latest Standard  
SA 8000, ISO 9001, ISO 14001 and ISO 45001  
meeting the highest international standards  
Strict quality control



### Electrical Characteristics (STC)

Module Type	HT54-18X(ND)-F				
Maximum Power(Pmax)	440W	445W	450W	455W	460W
Open Circuit Voltage(Voc)	38.6V	38.7V	38.8V	39.1V	39.4V
Short Circuit Current(Isc)	14.39A	14.47A	14.55A	14.61A	14.67A
Maximum Power Voltage(Vmp)	32.2V	32.4V	32.5V	32.7V	32.9V
Maximum Power Current(Imp)	13.68A	13.76A	13.85A	13.92A	13.99A
Module Efficiency	22.0%	22.3%	22.5%	22.8%	23.0%
Power Tolerance	0 ~ +3%				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	25A				
Operating Temperature	-40°C to +85°C				

\* STC: AM 1.5, Irradiance 1000W/m<sup>2</sup>, module temperature 25°C

### Electrical Characteristics (NMOT)

Module Type	HT54-18X(ND)-F				
Maximum Power(Pmax)	335W	338W	342W	346W	350W
Open Circuit Voltage(Voc)	37.1V	37.2V	37.2V	37.5V	37.8V
Short Circuit Current(Isc)	11.60A	11.66A	11.73A	11.77A	11.82A
Maximum Power Voltage(Vmp)	30.9V	31.1V	31.2V	31.4V	31.6V
Maximum Power Current(Imp)	10.84A	10.87A	10.96A	11.02A	11.08A

\* NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

### Bifacial output-rearside power gain

5%	Maximum Power(Pmax)	462W	467W	473W	478W	483W
	Module Efficiency	23.1%	23.4%	23.6%	23.9%	24.2%
15%	Maximum Power(Pmax)	506W	512W	518W	523W	529W
	Module Efficiency	25.3%	25.6%	25.9%	26.2%	26.5%
25%	Maximum Power(Pmax)	550W	556W	563W	569W	575W
	Module Efficiency	27.5%	27.8%	28.2%	28.5%	28.8%

Nominal Module Operating Temperature(NMOT) 43±2°C

Temperature Coefficient of Pmax γ (Pm) -0.29%/°C

Temperature Coefficient of Voc β (Voc) -0.25%/°C

Temperature Coefficient of Isc α (Isc) 0.046%/°C

Solar Cells Monocrystalline

No. of Cells 108 (6×18)

Dimensions 1762×1134×30mm

Weight 25.0 (±0.5) kg

Glass (Front /Back) High transmission coated tempered glass/Heat strengthened glass


Frame Anodized aluminum alloy

Junction Box IP68


Cable 4mm<sup>2</sup> (IEC) Length: (+) 1200mm, (-) 1200mm

Connectors Staubi MC4-EVO2A


Packaging Configuration 36 pcs/box: 936 pcs/ 40' HQ Container

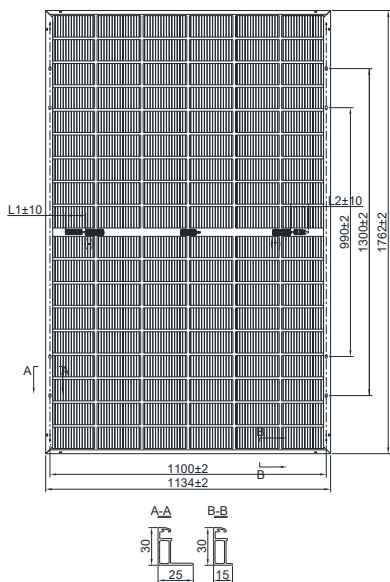

### IV Curves

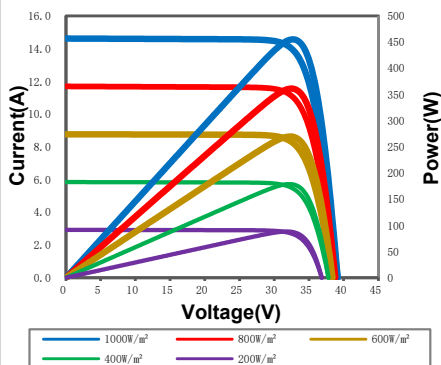

### Warranty

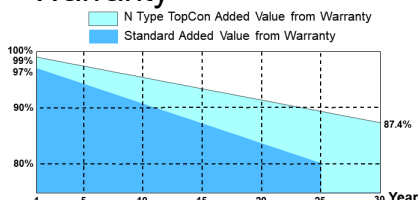

15-year product warranty\*

30-year warranty on power output\*

\* Specific information is referred to the product quality guarantee

\*The module recycling should be carried out by the professional institutions at the end of module life cycle

\*Copyright@2024V4 Specifications are subject to change without further notification